


SECTION A - A

NOTES:

- 1 - CONTACT MATERIAL: CARBON STEEL, 304 OR 316 STAINLESS STEEL.
- 2 - GYRATOR MOTOR TO BE: 3 HP, 230 - 460/3/60, TEFC, 1750 RPM.
- 3 - ALL ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 4 - ALL CONNECTIONS TO LIVE BOTTOM BIN TO BE FLEXIBLE.

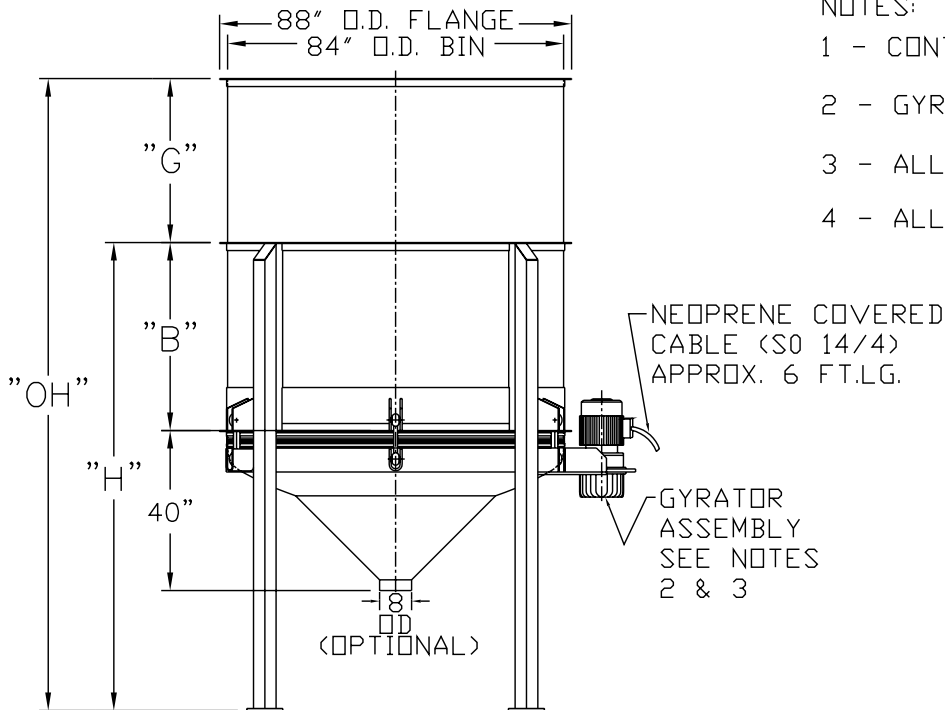

MODEL NO.	CAPACITY CU.FT.	"B"	"H"	"G"	"OH"
LBB 7-300	300	47"	117"	41"	158"
LBB 7-350	350	47"	117"	55"	172"
LBB 7-400	400	47"	117"	69"	186"

THE RECIPIENT OF THIS DOCUMENT AGREES NOT TO REPRODUCE, COPY, TRANSMIT OR USE THIS DOCUMENT AND/OR THE INFORMATION CONTAINED IN THIS DOCUMENT IN WHOLE OR IN PART, FOR ANY PURPOSE, EXCEPT WITH THE WRITTEN PERMISSION OF VIBRA SCREW INCORPORATED.

DO NOT SCALE PRINT		<b>Vibra Screw Incorporated</b> 755 Union Blvd. Totowa, N.J. 07512-2207	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		<b>TITLE 7 - 300 TO 400 LIVE BOTTOM BIN 300, 350 AND 400 CU. FT. AND 6K GYRATOR</b>	
TOLERANCES: .XX = ±.01 .XXX = ±.005 FRACTIONAL = ±1/32" ANGULAR = ±1/2" BREAK SHARP EDGES .005-.015 ALL SMALL FILLETS .020-.040R.		SCALE 1/2=12 CAD FILE NAME LBB\ASSY\17992-SD_7_300T0400_6K	DWG. NO. 17992-SD REV. NO. 1

1	WEBSITE DRAWING	MJM	8/31/01			
REV.	DESCRIPTION	DWN. BY DATE	CHK. BY DATE	APP. BY DATE	ELEC. APP. DATE	