

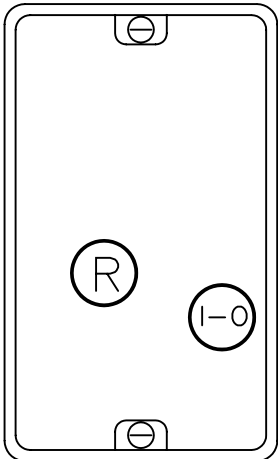


*Vibra Screw Incorporated*  
**VIBRATOR SWITCH BOX (VS-SB1)**

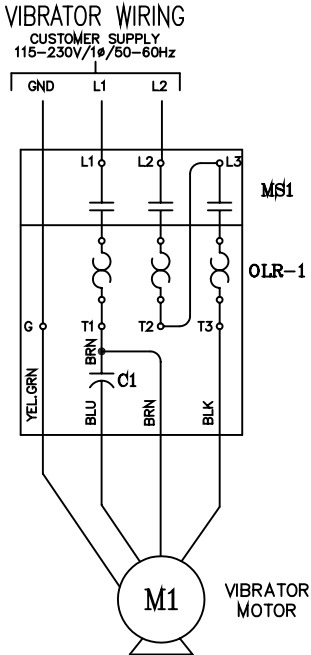

PERFORMANCE SPECIFICATIONS:

AC LINE INPUT VOLTAGE(+/- 10%, 50/60Hz) 115-230  
 AC LINE FREQUENCY (Hz), # OF PHASES 50/60, 1  
 MAINTAINED START/STOP P/B (I-O)  
 MANUAL RESET P/B (R), START CAPACITOR  
 CONTACTOR W/ADJUSTABLE TRIP OVERLOAD

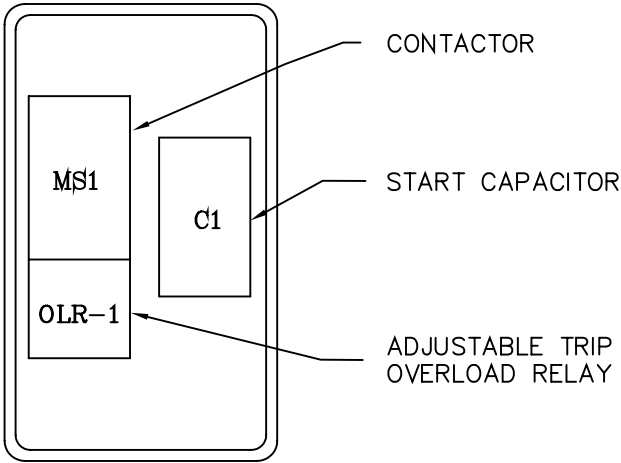

**WALL MOUNT ENCLOSURE**  
 DIM.: 7.75" x 4.5" x 5.25"

V.S.I. P/N: VS-SB1

VIBRA SCREW INCORPORATED  
 755 UNION BLVD., TOTOWA, N.J. 07512  
 PH: (973) 256-7410 FAX: (973) 256-7567  
 E-MAIL: info@vibrascrewinc.com \* www.vibrascrewinc.com