



Vibra Screw Incorporated

VIBRATOR SWITCH BOX (VS-SB3)

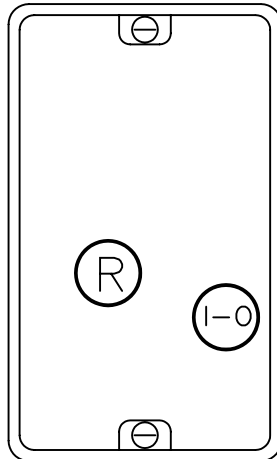


PERFORMANCE SPECIFICATIONS:

AC LINE INPUT VOLTAGE(+/- 10%, 50/60Hz) 230-480
AC LINE FREQUENCY (Hz), # OF PHASES 50/60, 3
MAINTAINED START/STOP P/B (I-O)
MANUAL RESET P/B (R),
CONTACTOR W/ADJUSTABLE TRIP OVERLOAD

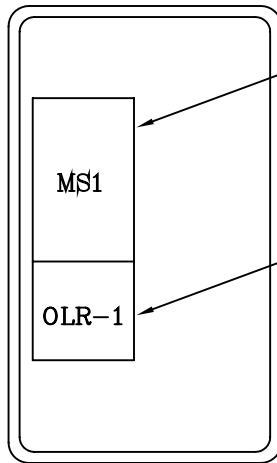

CONTACTOR

ADJUSTABLE TRIP
OVERLOAD RELAY

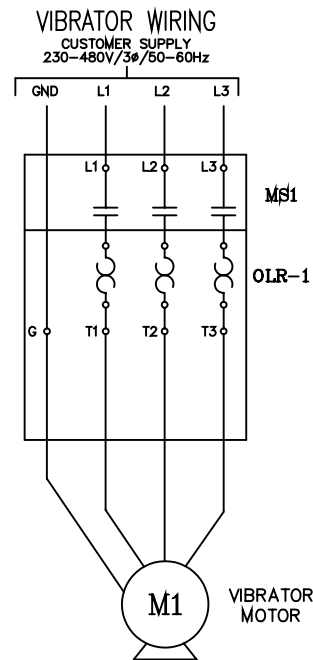

WALL MOUNT ENCLOSURE

DIM.: 7.75" x 4.5" x 5.25"

V.S.I. P/N: VS-SB3

VIBRA SCREW INCORPORATED
755 UNION BLVD., TOTOWA, N.J. 07512
PH: (973) 256-7410 FAX: (973) 256-7567
E-MAIL: info@vibrascrewinc.com * www.vibrascrewinc.com