


SECTION A - A

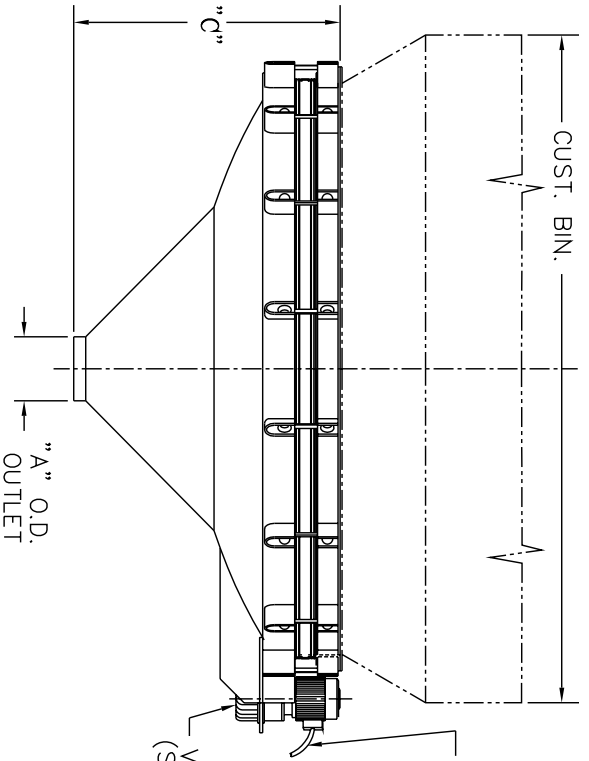

NEOPRENE COVERED CABLE (SO 12/4) APPROX. 6FT. LONG. BY V.S.

- NOTES:
- 1 - CONTACT MATERIAL: CARBON STEEL, 304 ST'L. STEEL OR 316 STAINLESS STEEL.
 - 2 - GYRATOR MOTOR TO BE 5 HP, 1750 RPM, TENNY, OR EXPL. PF., 230 OR 460/3/60.
 - 3 - ALL ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
 - 4 - ALL CONNECTIONS TO BIN ACTIVATOR TO BE FLEXIBLE.

"A" OUTLET SIZE	"C" OVERALL HEIGHT
10"	71 1/2"
12"	70 1/2"
14"	69 1/2"
16"	68 1/2"

THE RECIPIENT OF THIS DOCUMENT AGREES NOT TO REPRODUCE, COPY, TRANSMIT OR USE THIS DOCUMENT AND/OR THE INFORMATION CONTAINED IN THIS DOCUMENT IN WHOLE OR IN PART FOR ANY PURPOSE, EXCEPT WITH THE WRITTEN PERMISSION OF VIBRA SCREW INCORPORATED.

Vibra Screw Incorporated

755 UNION BLVD. TOTOWA, N.J. 07512

TITLE: 12'-0" DIA. BIN ACTIVATOR WITH PREASSEMBLED MOUNTING RING AND OIL LUBRICATED GYRATOR

DWG/DATE: 5/03/2001
 I.S. 5/03/2001
 CAD FILE NAME: N:\BA\SD\SSV\15320-SD
 CHK. BY: [blank]
 APP. BY: [blank]
 DWG. NO.: 15320-SD